


Wall-Mounted Basin Mixer 6777-X2-80CP



unit: mm[inch]

- 1.Brass material of spout meets JIS C2700 standard.
- 2.Ceramic valve with CERAMTEC ceramic disc / (Germany)
- 3.Handle valve turning range from closed position: 90°
- 4.Handle can be moved up to 22° to adjust water flow from closed position; hot and cold water controlled by swinging handle for 45° both right and left sides.
- 5.The mixing valve could be installed in the cemented and wood wall.
- 6.The inlet of both sides are assembled the check valves for avoiding the backflow of cold and hot water.
- 7.The body of valve should be buried in the wall beforehand with 1"(2.5cm) adjusting tolerance in depth.
- 8.Water flow rate would be controlled by cartridge.

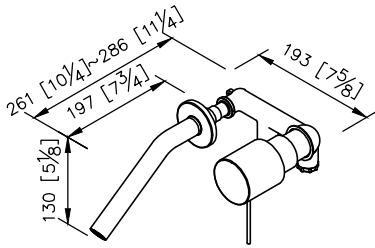