

INSTALLATION INSTRUCTIONS

SINGLE-HANDLE KITCHEN FAUCET



廚房龍頭安裝說明

PATENT NUMBER:

專利號碼:

001018899-0001

001018899-0002

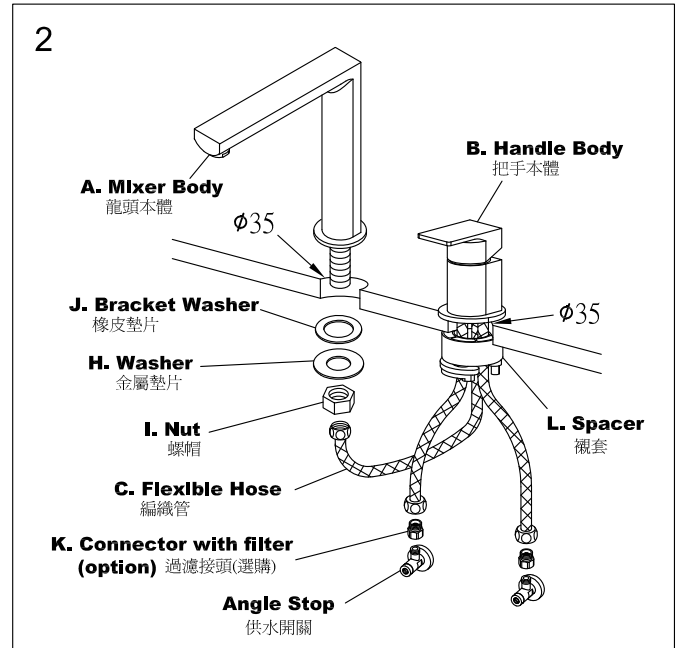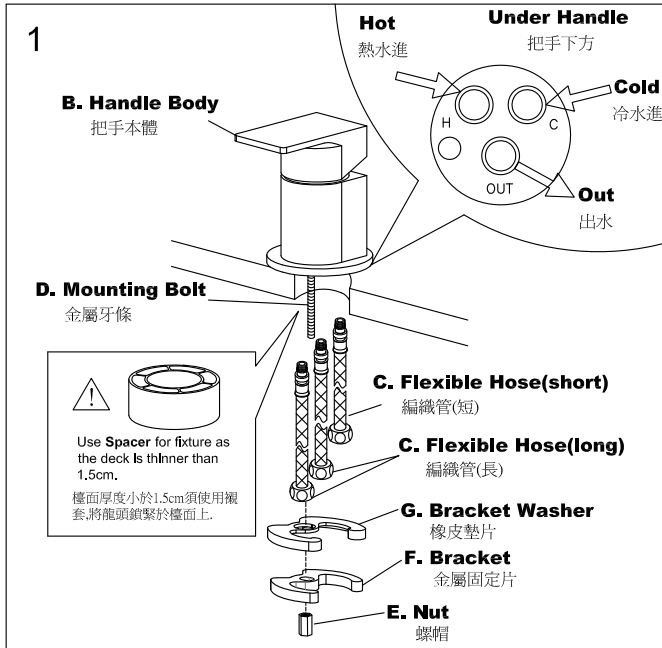

CAUTION : Prevent The Risk Of Product Damage.

注意：為增加產品使用壽命，請依說明清潔供水管路。

a./ Turn the angle stops (water suppliers) on and run for 1 minute before connect supply hose (flexible hose) to faucet body. or b./

把龍頭、供水開關及編織管接好並鎖緊之後，把起泡器移開，把熱水及冷水全部轉開一分鐘，然後把水關掉再把起泡器裝回去。

b./ Connect and tighten the faucet and angle stops with supply hose (flexible hose) to finish installation, then remove the aerator, fully turn on the hot and cold water valves on faucet and run for 1 minute, then turn off the water and reinstall the aerator.

安裝編織管之前，先把供水開關全開排水一分鐘。或 b./



Use **Spacer** for fixture as the deck is thinner than 1.5cm.

檯面厚度小於1.5cm須使用襯套，將龍頭鎖緊於檯面上。

1. Screw **Mounting Bolt** into bottom of **Handle Body**, insert **Flexible Hoses** through deck hole and screw into the bottom of **Handle Body**, position **Handle Body** on fixture and place **Bracket** with **Bracket Washer** and **Nut** onto **Mounting Bolt**, then tighten **Nut** securely. (Fig.1)

將金屬牙條鎖緊固定於把手本體。同時，將編織管穿過洗臉盆(檯)洞口並且鎖入把手本體下方，然後從金屬牙條下方依序套入橡皮墊片、金屬固定片和螺帽，確認把手方向位置後，鎖緊螺帽固定把手即可。(圖.1)

2. Position **Faucet Body** on the deck for fixture, then place **Washer** with **Bracket Washer** onto **Faucet Body**, tighten **Nut** securely. (Fig.2)

從龍頭本體下方依序套入橡皮墊片、金屬固定片和螺帽，確認龍頭方向位置後，鎖緊螺帽固定龍頭。(圖.2)

3. Install **Connector with filter** onto the outlet of **Angle Stop** first, then connect **Flexible Hoses** from **Handle** to **Spout** and **Connector with filter (option)**.(Fig.2)

先連接過濾接頭到進水開關，然後連接編織管從閥體到出水口及過濾接頭。(圖.2)

FIXING CONTENTS

組配件內容

