


# INSTALLATION INSTRUCTIONS

## SINGLE-HANDLE KITCHEN FAUCET

### 廚房龍頭安裝說明

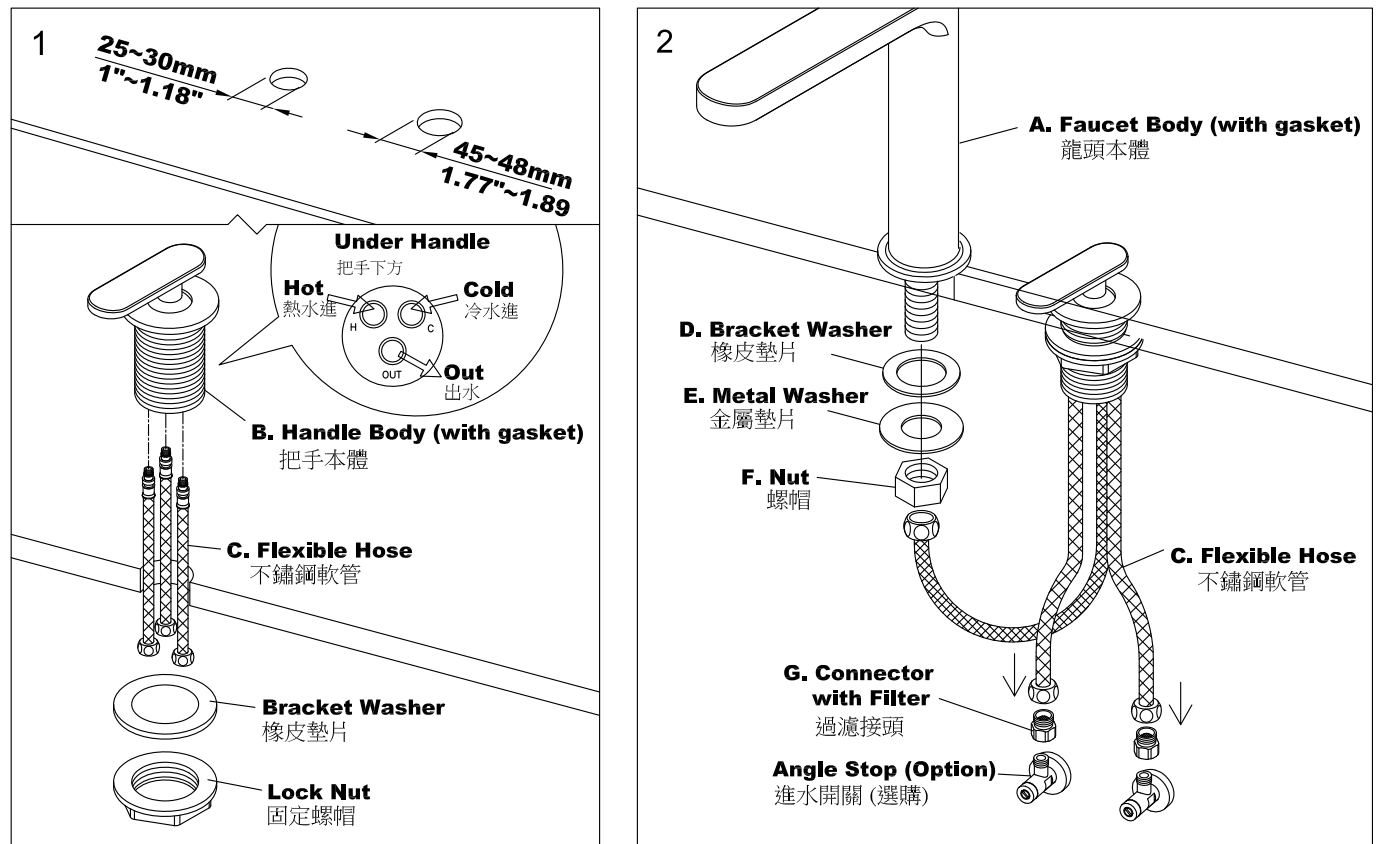

1. Drill 2 holes on appropriate position as Fig.1 shown.  
在適當的位置鑽2個孔，如圖1所示。
2. Insert the **Flexible Hoses** through deck hole and screw them into the bottom of **Handle Body** as figure 1 shows. Position **Handle Body** on fixture, place **Lock Nut** with **Bracket Washer** onto **Handle Body**, and then tighten **Lock Nut** securely. (Fig. 1)  
將不鏽鋼軟管(X3)穿過洗臉盆(檯)洞口並且依圖示鎖入把手本體，從把手本體下方依序套入橡皮墊片和固定螺帽，確認把手方向位置後，鎖緊螺帽固定把手即可。(圖.1)
3. Position **Faucet Body** on the deck for fixture, place **Metal Washer** with **Bracket Washer** onto **Faucet Body**, tighten the **Nut** securely to fix the faucet, and then connect **Flexible Hose (Out)** to the bottom of **Faucet Body**. (Fig. 2)  
從龍頭本體下方依序套入橡皮墊片、金屬固定片和螺帽，確認龍頭方向位置後，鎖緊螺帽固定龍頭，再將連接到把手底部出水位置的不鏽鋼軟管鎖緊固定於龍頭本體即可。(圖.2)
4. Install **Connectors with Filters** onto the outlets of **Angle Stops (option)** first, and then connect the Hot & Cold **Flexible Hoses** to the **Connectors with Filters**. (Fig. 2)  
連接過濾接頭到進水開關，連接冷熱進水不鏽鋼軟管到供水開關，確認完成安裝程序。(圖.2)

## FIXING CONTENTS

### 組配件內容

