


Concealed Shower Mixer
7790-X3-80CP



unit: mm[inch]

- 1.Brass of forging body meets JIS 3771 standard.
- 2.Finish meets the standard of ASTM-SC2.
- 3.Ceramic valve with CERAMTEC ceramic disc/(Germany).
- 4.The mixing valve could be installed in the cemented and wood wall.
- 5.G1/2 inlet.
- 6.The faucet should be used at the water pressure from 1 to 6 kg/cm².
- 7.The body of valve should be buried in the wall beforehand with 1"(2.5cm) adjusting tolerance in depth.
- 8.Past 500,000 times lifespan test.
- 9.Coordinates with other products in Arch collection.

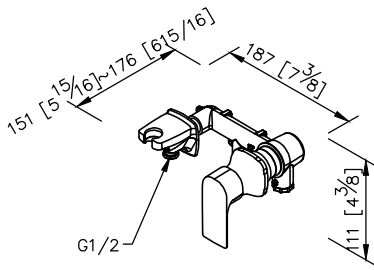